

GRAPHTEC

Small Cutting Machine

Craft ROBO Lite

The Craft ROBO Lite can cut without the need to connect to a PC !




CC300-20B (Blue)



CC300-20P (Pink)

USING THE SD CARD, THIS ENABLES EVERYONE TO CUT EASILY !

By courtesy of Emiko Kume.

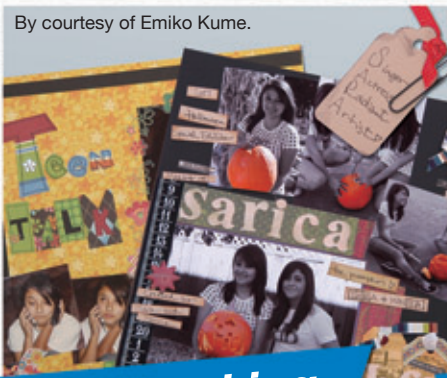

Scrapbooking




Cards




Stencils

Using to the SD card

You can cut without connecting the PC.

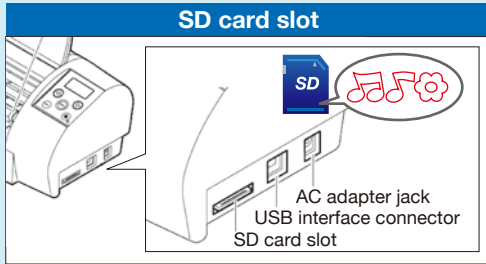

Data that is created by the ROBO Master can be saved in the SD card



1 Cutting by the ROBO Master from the PC




2 Inserting the SD card, operating on the Craft ROBO then cut



New functions of the ROBO Master (Standard software)

“Offset” and “Welding” of graphic functions are newly added on the ROBO Master. It provides more various cutting capability.

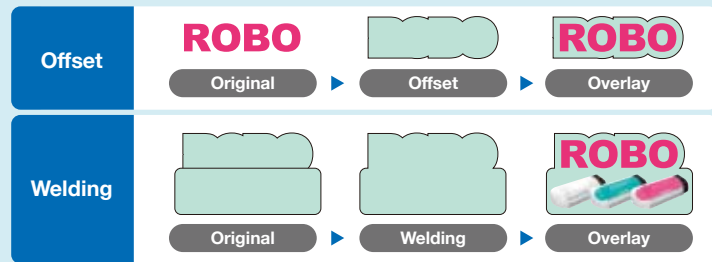

New operation panel includes an LCD display

Cutting can be done with interactive operation using the new operation panel which includes an LCD display.

New cutting carrier sheet

New design carrier sheet that has grid printing is provided. This new carrier sheet enables you to adjust the media position and improves operability.

Specifications

Item	CC300-20
Configuration	Grit rolling
Driving method	Stepping motor
Cutting area	Max. 200 mm x 305 mm (when expand mode)
Usable media width	Max. 270 mm *When using the carrier sheet
Operation speed	10 to 70 mm/s (10 mm/s step, 7 steps)
Mechanical step size	0.05 mm
Program step size	0.05 mm
Repeatability	0.2 mm / 300 mm
Settable number of pens	1
Type of pen	Dedicated cutter plunger Universal ball point pen plunger (available as an accessory)
Cutable medias	*Carrier sheet is necessary Scrapbooking paper (Basil paper), Inkjet photo paper, Kent paper (157 g/m2), Drawing paper, Postcard *Media may not be cut according to the material
Interface	USB 2.0 (Full speed)
LCD display	8 characters x 2 lines
SD card	Reading only, Max. 2 GB (SDHC is not compatible)
Power supply	AC adapter 24 VDC (1.25 A)
Power consumption	12 W
Operating environment	10 to 35 deg. C, 35 to 75 % R.H. (non-condensing)
Guaranteed accuracy environment	16 to 32 deg. C, 35 to 70 % R.H. (non-condensing)
External dimensions (W x D x H)	420 mm x 140 mm x 112 mm (excluding protrusions)
Weight	Approx. 2 kg

Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners. Specifications are subject to change without notice.

Standard accessories

- AC adapter, Power cable
- USB cable
- Craft ROBO Software Package CD-ROM
- Set-up Manual
- Quick Application Guide
- Carrier sheet
- Cutter Plunger (with blade tip adjustment cap)

* One each of blade adjustment cap (Blue, Yellow, Red) are attached with the cutter plunger.

Supply

Item	Model	Description
Cutter Set	CR09305E	1 holder with supersteel blade and adjustment caps
Ballpoint pen holder	CR09306E	1 ballpoint pen holder
Carrier sheet	CR09308E	Carrier sheet A4, 2 sheets
Cutting mat	CR09303E	1 Cutting Mat
Card without Craft Paper Backing	CR09002E	Card without Craft Paper Backing, 15 sheets/pack

GRAPHTEC

Graphtec Corporation

503-10 Shinano-cho, Totsuka-ku, Yokohama 244-8503, Japan
Tel : +81-45-825-6250 Fax : +81-45-825-6396
Email : webinfo@graphtec.co.jp

Website <http://www.graphteccorp.com>



Cr20080829as